



48BMOMxxI

DIN RAIL FIBER BOX UP TO 24 FIBERS FOR INDUSTRY

P/N: 48BMOM12SCDLCQI (UNLOADED)

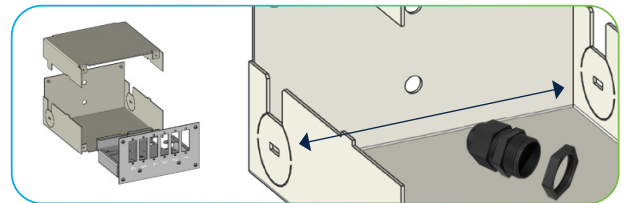

2 CABLE ENTRIES FOR M20 CABLE GLANDS

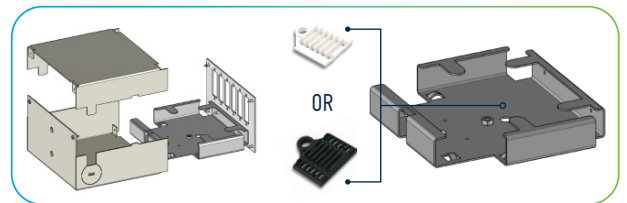

HEATH SHRINK OR MECHANICAL SPLICE POSSIBLE

DESCRIPTION/APPLICATION

The Din rail fiber box is suitable for indoor harsh environmental networks such as industry. 6 duplex SC or quad LC. It is delivered unloaded and splicing is made possible thanks to the additional splice holders for heatshrink or mechanical splice. The maximum number is 12 splices while it's 24 direct connections.

PHYSICAL PROPERTIES

- STEEL 12/10 MM
- ELECTROSTATIC POWER COATING DARK GREY, RAL7016
- IP 20 RATING
- OPERATING TEMPERATURE: -40°C TO + 65°C
- 2 X Ø 20 MM CABLE ENTRIES
- DIMENSIONS: WIDTH 61 MM X DEPTH 113 MM X HEIGHT 115 MM
- WEIGHT: 0,51 KG

ORDER INFORMATION

ITEM NO	DESCRIPTION	PACKAGING	NVG#
48 BMOM 6 SCD LCQ I	DIN RAIL FIBER BOX IP20 FOR 6 SCD OR LCQ ADAPTERS	UNIT	2010072